
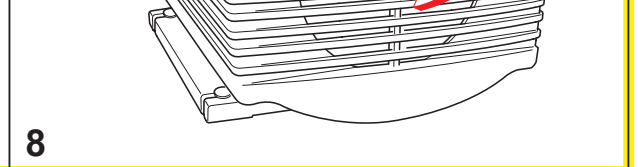
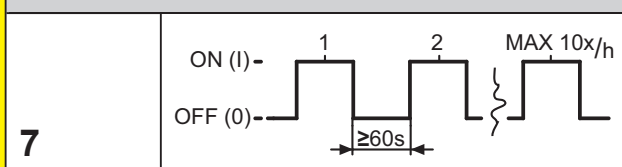
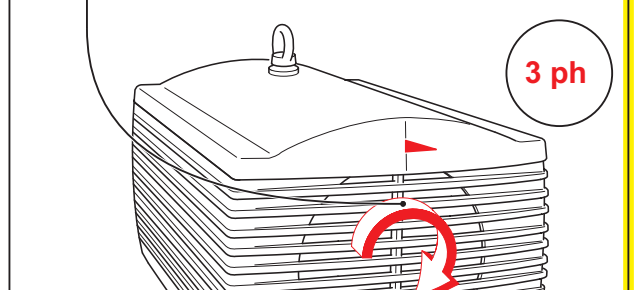
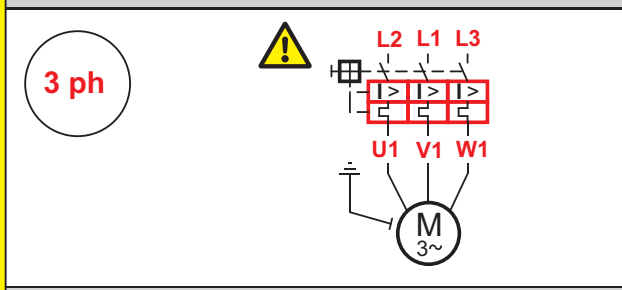
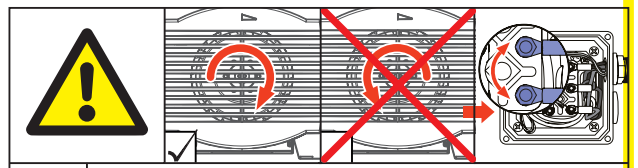
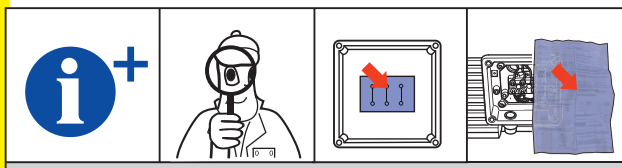
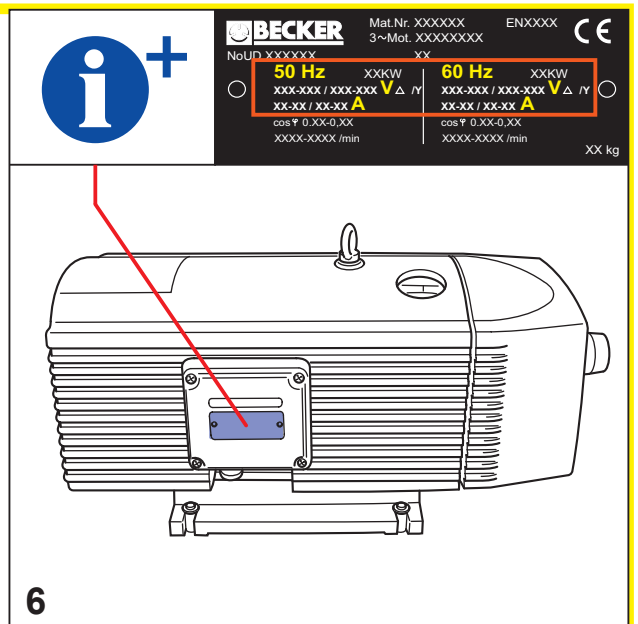
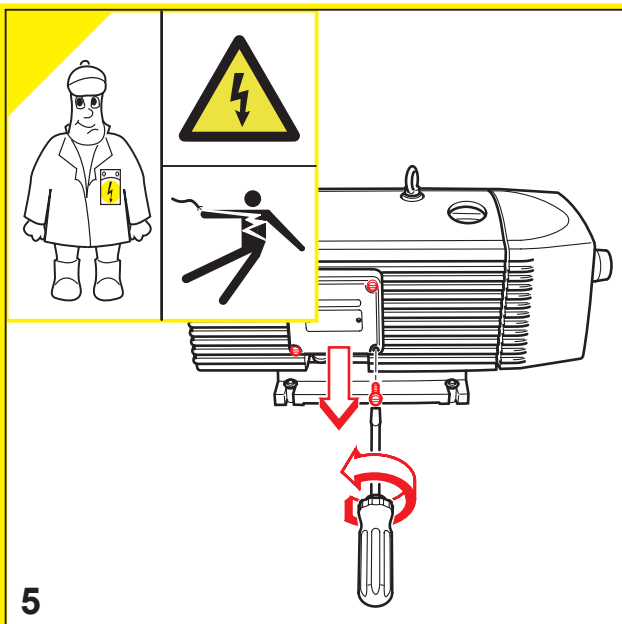
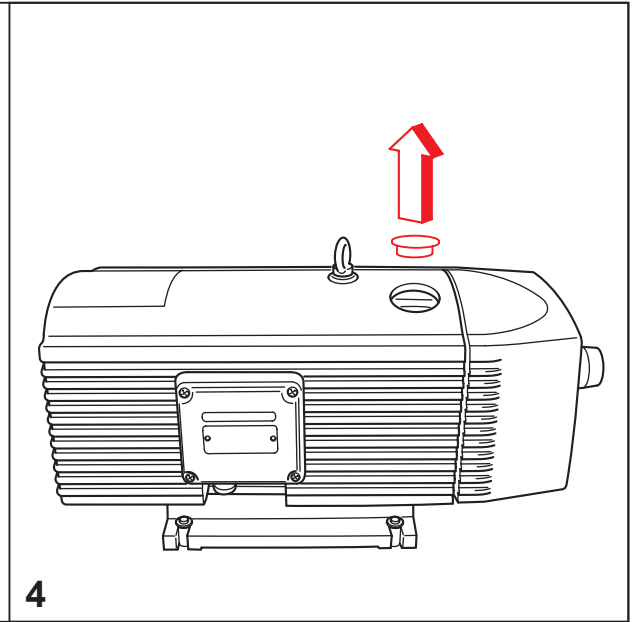








Betriebsanleitung
 Operating Instructions
 Instructions de service
 Istruzioni d'uso
 Handleiding
 Instrucciones para el manejo
 Manual de instruções
 Naudojimosi instrukcija
 Kasutusjuhend
 Lietošanas instrukcija
 Driftsinstruks
 Driftsinstruktioner
 Käyttöohje
 Driftsvejledning
 Instrukcja obsługi


Kezelési útmutató
 Návod k obsluze
 Navodilo za uporabo
 Návod na obsluhu
 Upute za rad
 Manual de operatii
 Treoracha Oibriúcháin
 Οδηγίες χρήσης
 El Kitabi
 Инструкции за експлоатация
 Инструкция по эксплуатации
 取扱説明書
 사용설명서
 使用说明书

				mbar
			$L_{pA} = 67 \text{ dB(A)} - 50\text{Hz}$ $L_{pA} = 72 \text{ dB(A)} - 60\text{Hz}$ $K_{pA} = 3 \text{ dB(A)}$	



1 	2		
39 kg 85 lbs			

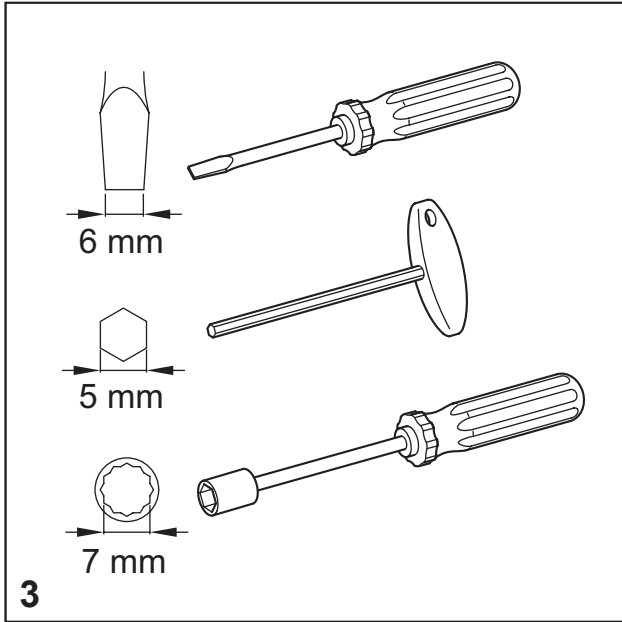

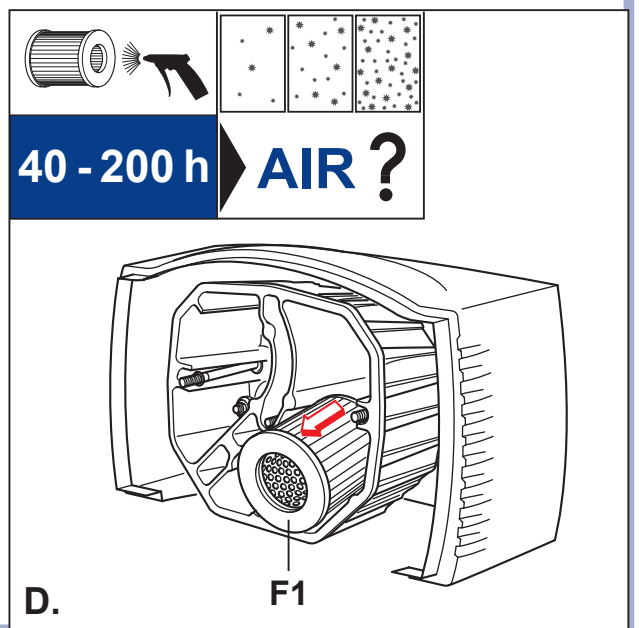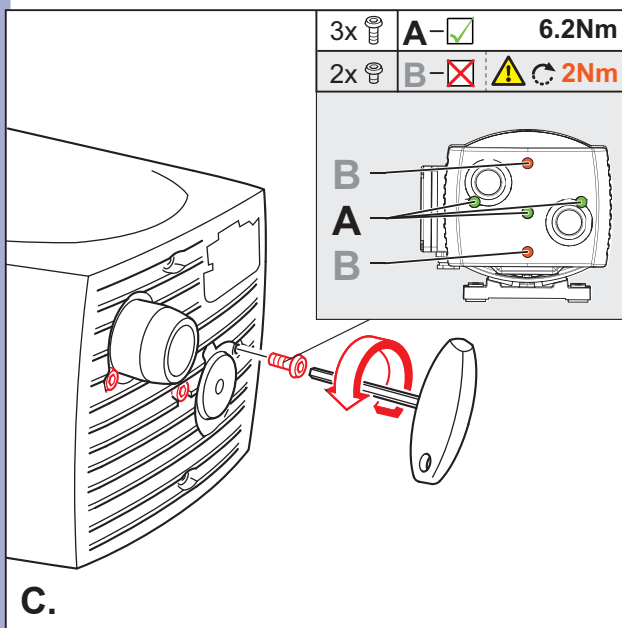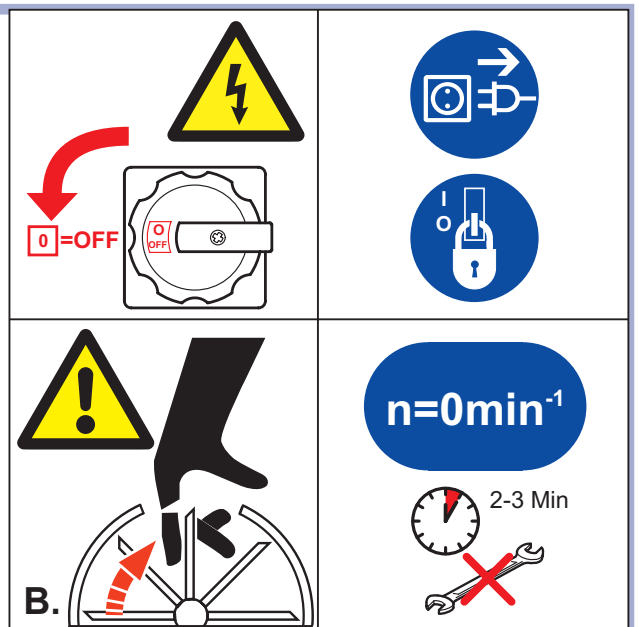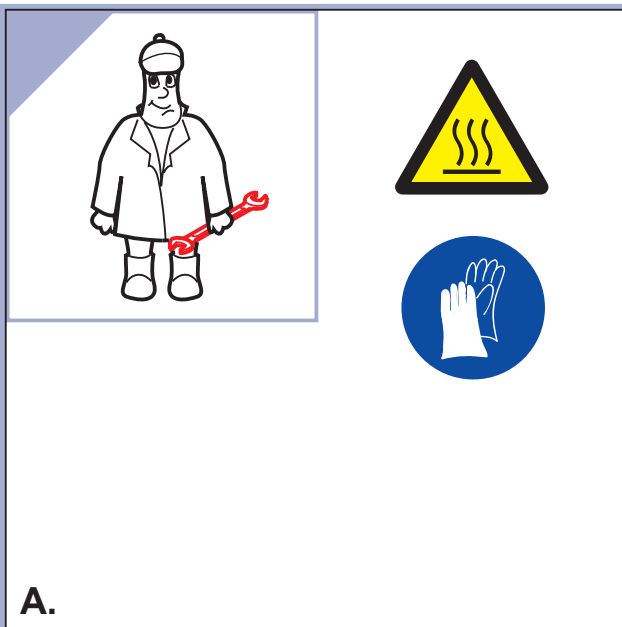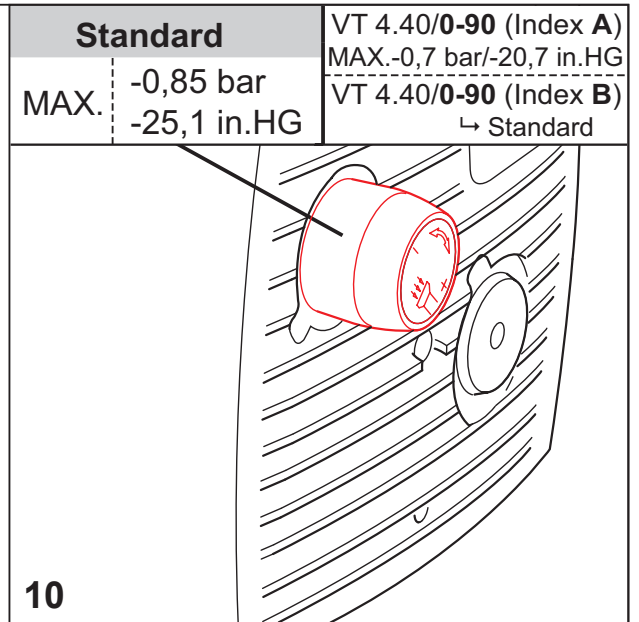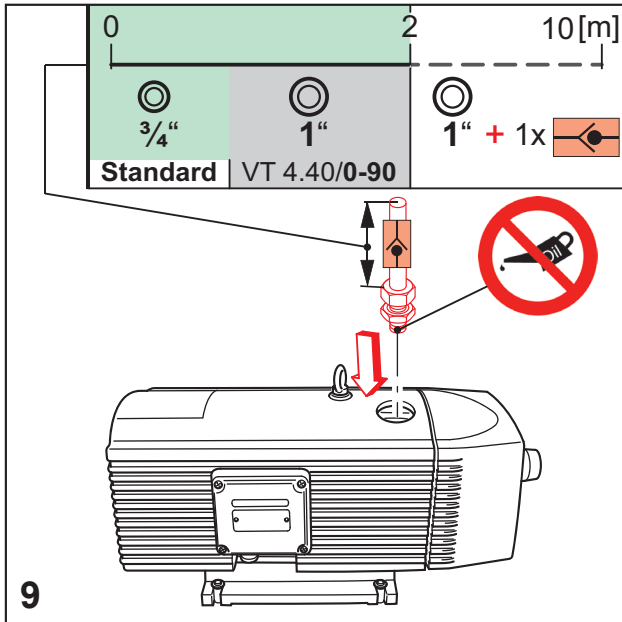




F1: D: 64 mm
H: 70 mm
No.: 9095050000





EN149 - FFP3
42 CFR 84 - N100

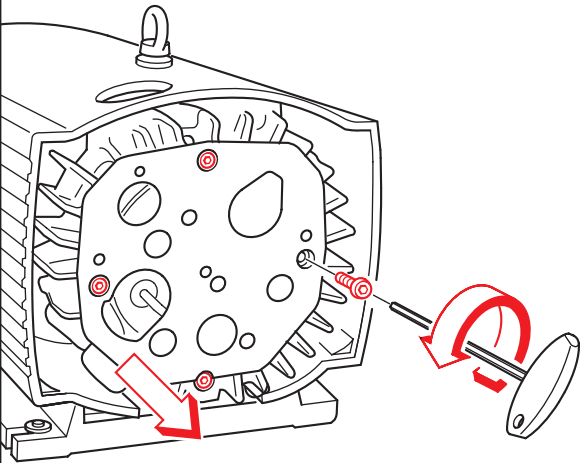
E.





F.



3000 h


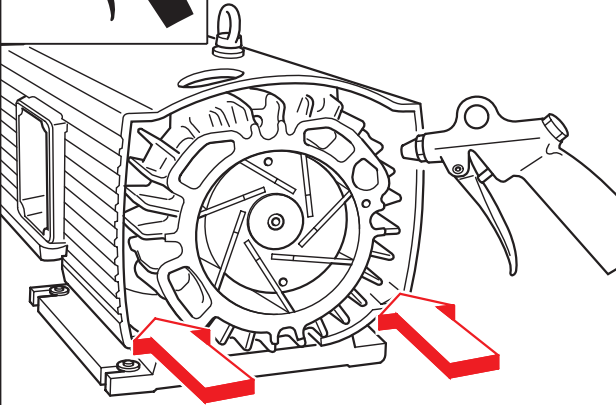


	Standard	 $A < A_{MIN}$
	$A_{MIN} = 28\text{mm}$	
	VT 4.40/0-90	
	$A_{MIN} = 33\text{mm}$	


Standard → No. 90135200007 (SET)

VT 4.40/0-90 (Index B) → No. 90139700007 (SET)

G.

H.



www.becker-international.com



Gebr. Becker GmbH
Hölker Feld 29-31
D-42279 Wuppertal
info@becker-international.com



SERVICE
www.becker-international.com
Sales and service network